


QUIET SCREEN GENERAL INSTRUCTIONS


Quiet Screens - Pole Assembly




1. Remove trim covers from top of screen and side to be joined to pole

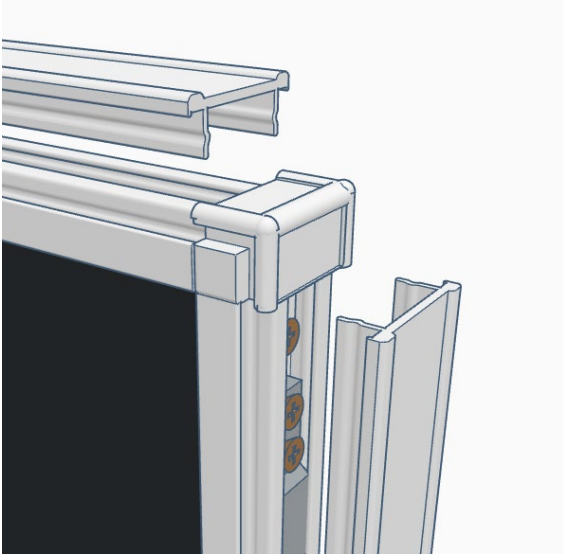


2. Remove corner end cap (2x PH screws)

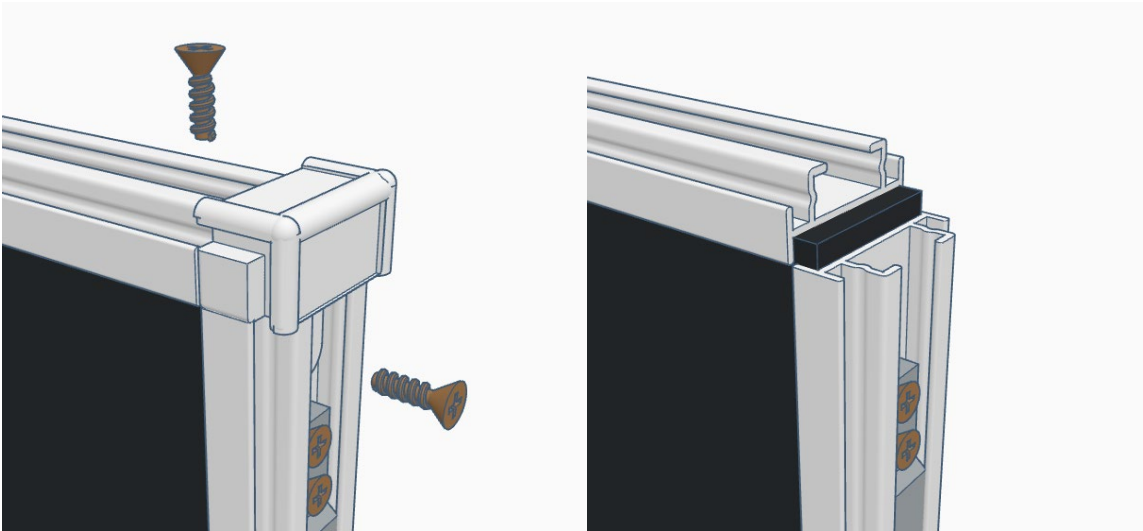


3. Install corner pole cap (2x PH screws)

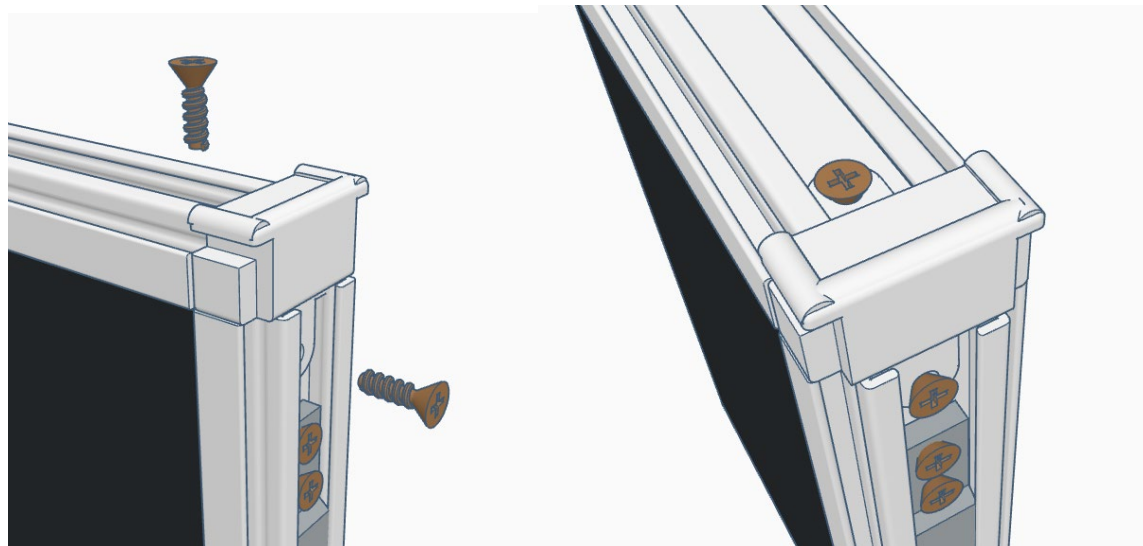


4. Re-install trim cover to top of screen

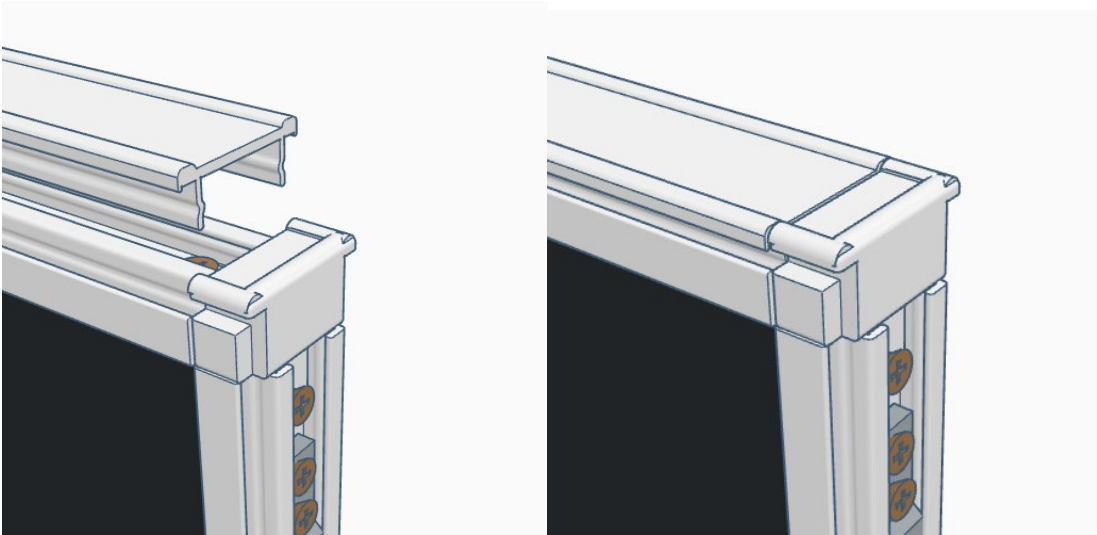


5. Ensure pole has cap, adjustable foot and sufficient hooks in place

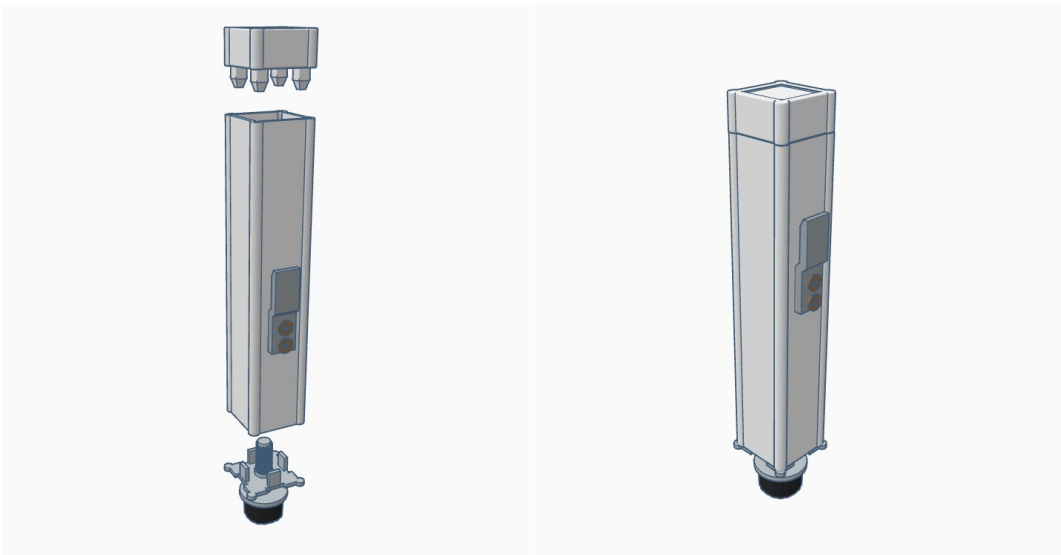


6. Ensure pole hooks line up with screen hooks, move if necessary

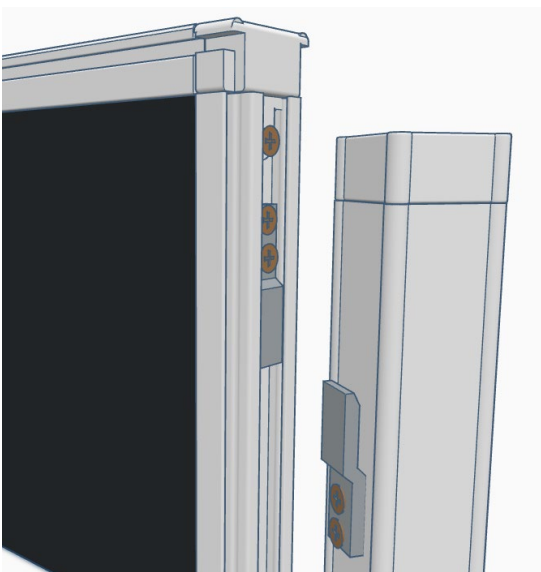

7. Lift and slide screen hooks over the pole hooks until the tops align. Adjust foot if necessary.

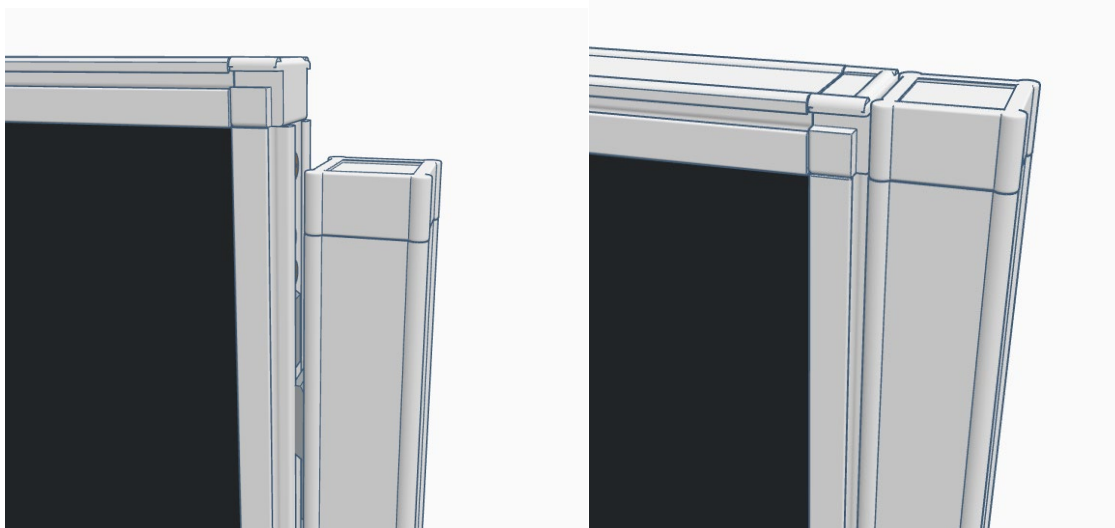


8. Repeat for all screens and poles to make the configuration required


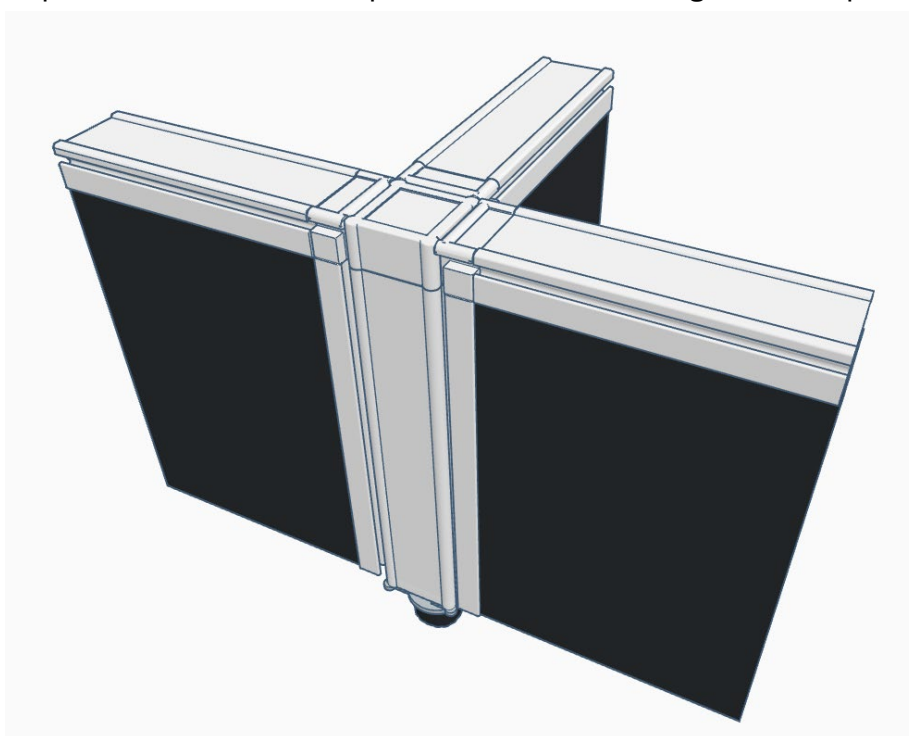


Quiet Screens – attaching the desktop


1. Configure the screens and poles to make the configuration required.

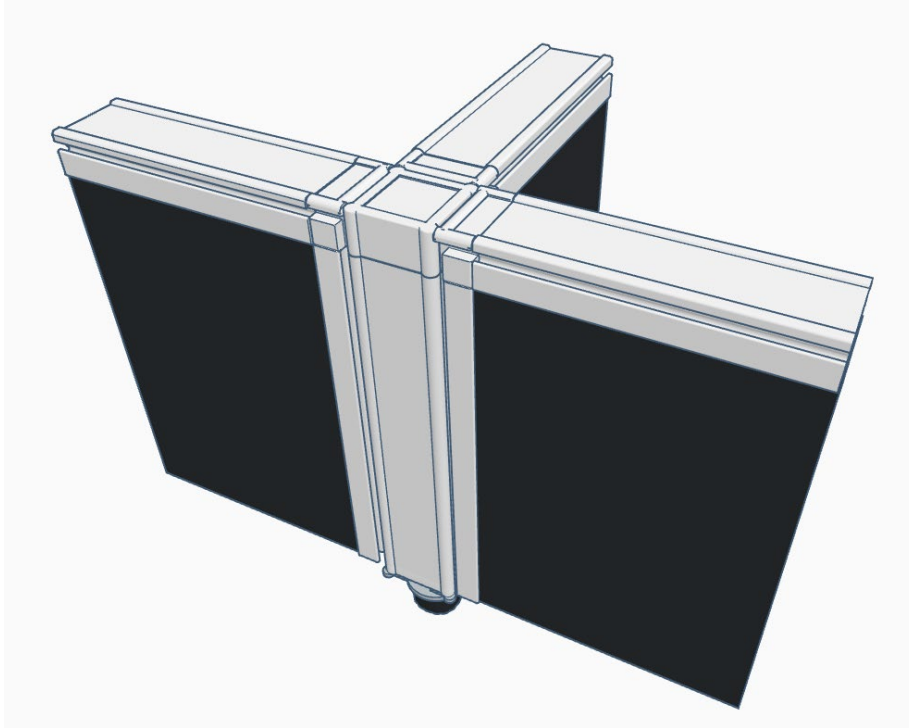


2. Slot the desk mount brackets into the channel at desk height. Angle the lip into the channel first then rotate the bracket down until at a right angle to the screen.

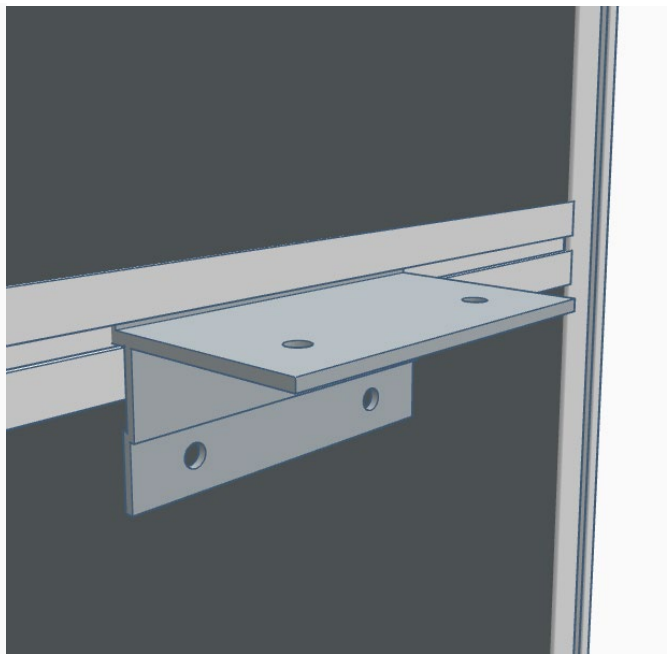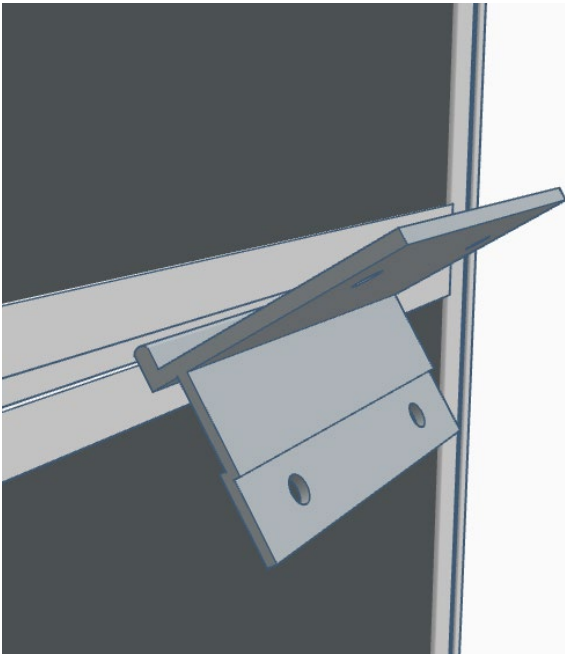


3. Repeat until all brackets are in place. Suggested quantity is one per short side and two per long side of each desktop.

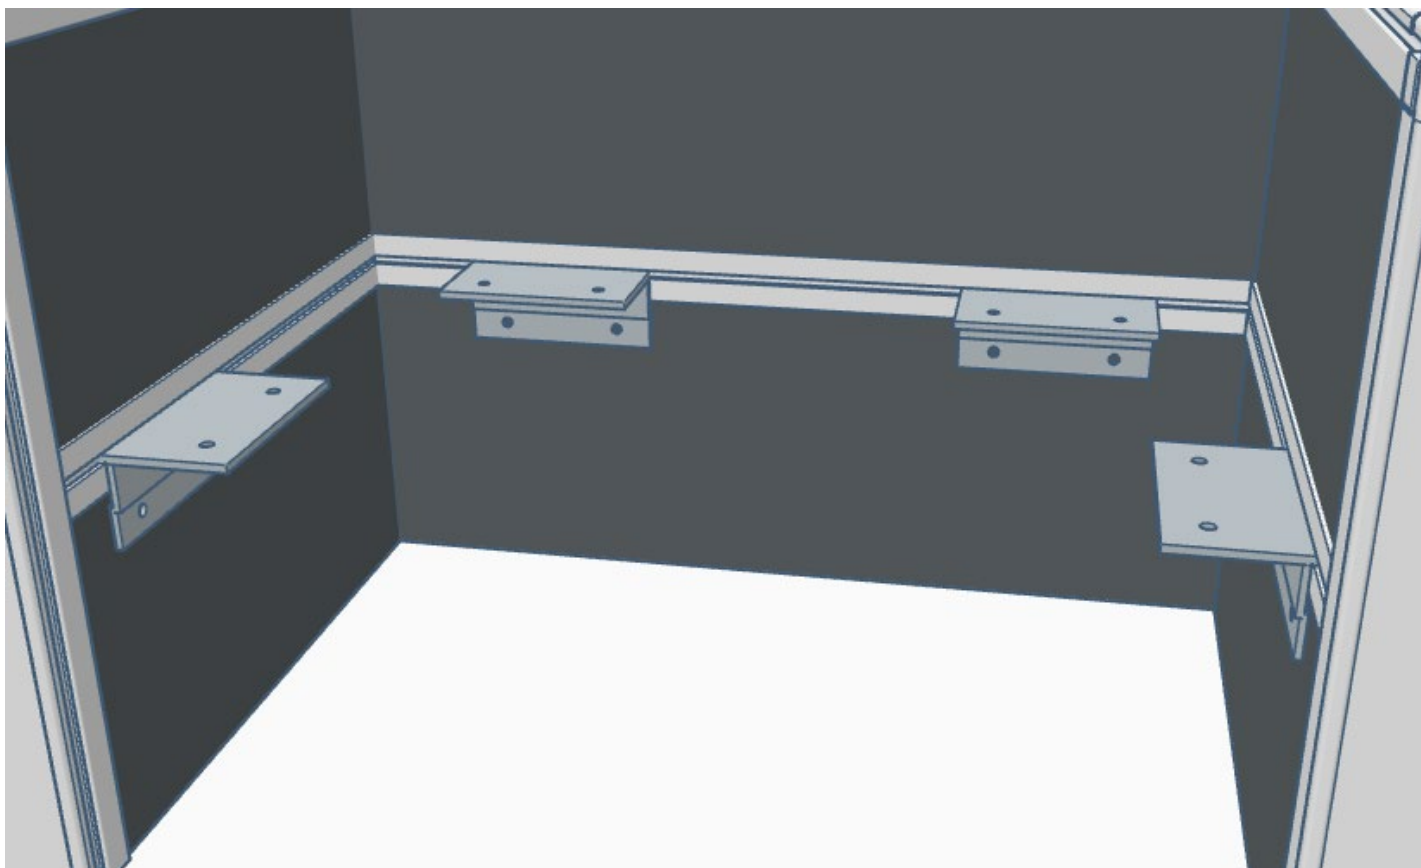

4. Place desktop on top of brackets and ensure screens are flush against desktop on all sides.

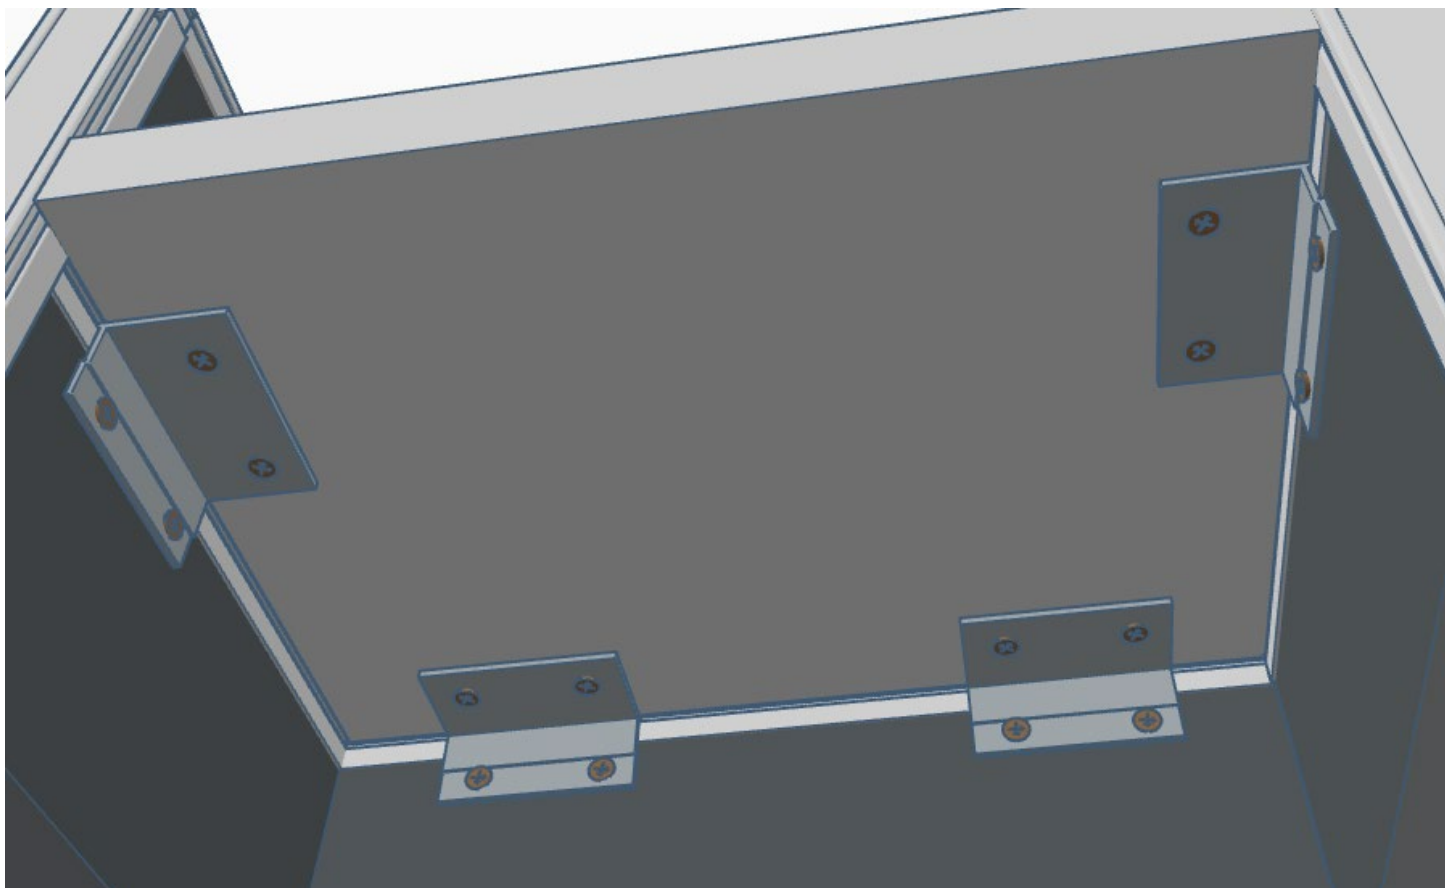


5. Install four PH screws into each bracket to secure the desktop and screens.

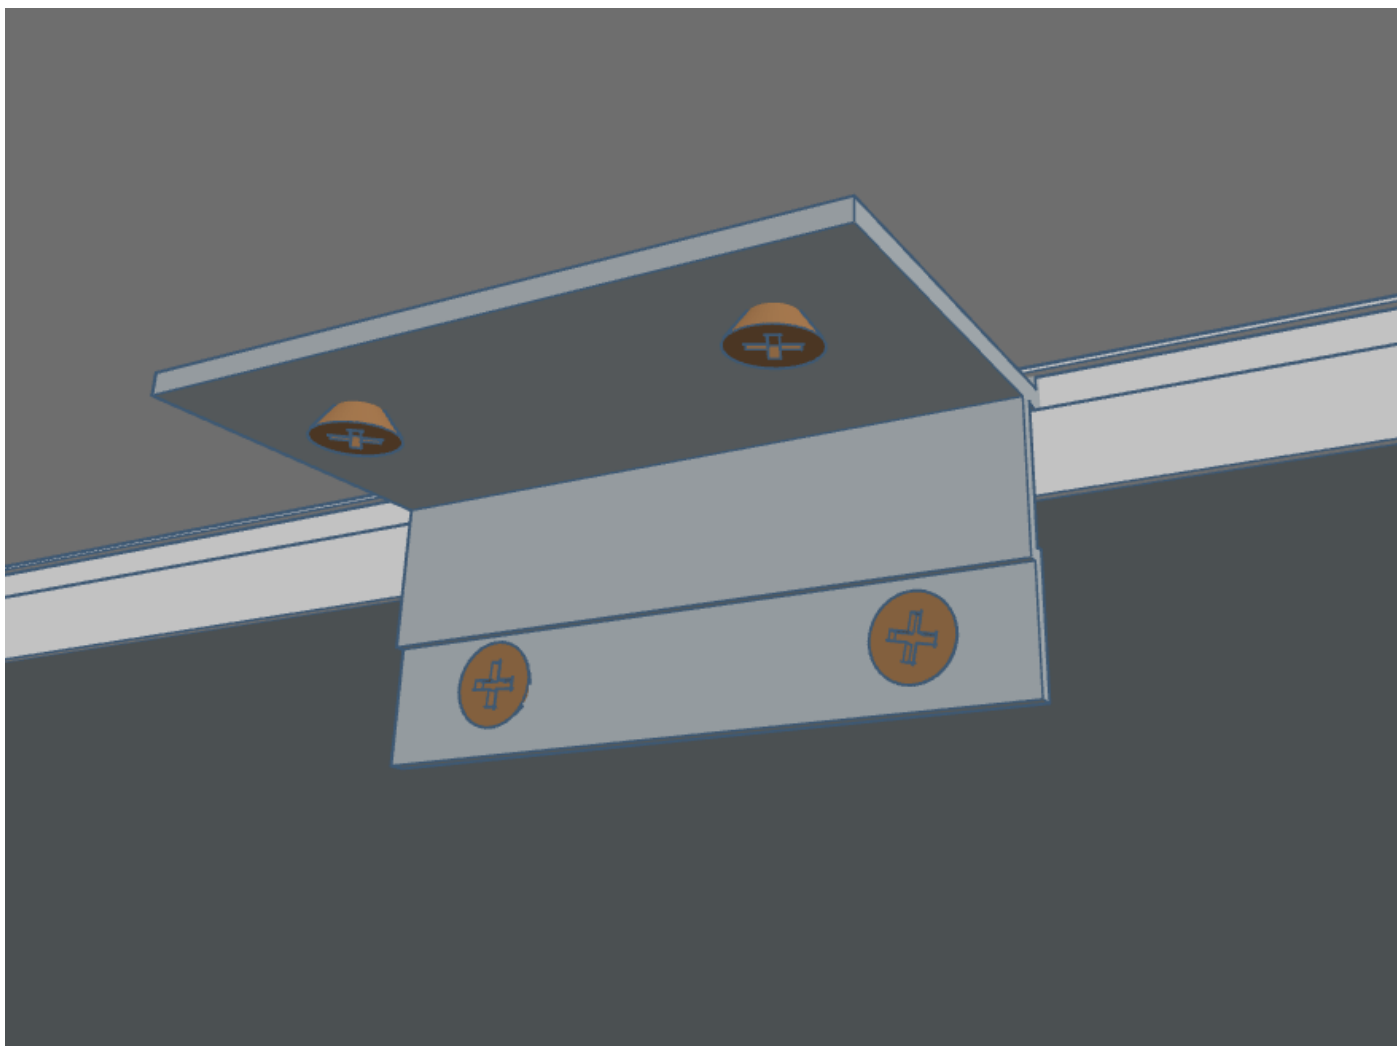

Quiet Screens – attaching to Height Adjustable desk

1. Configure the screens and poles to make the configuration required.

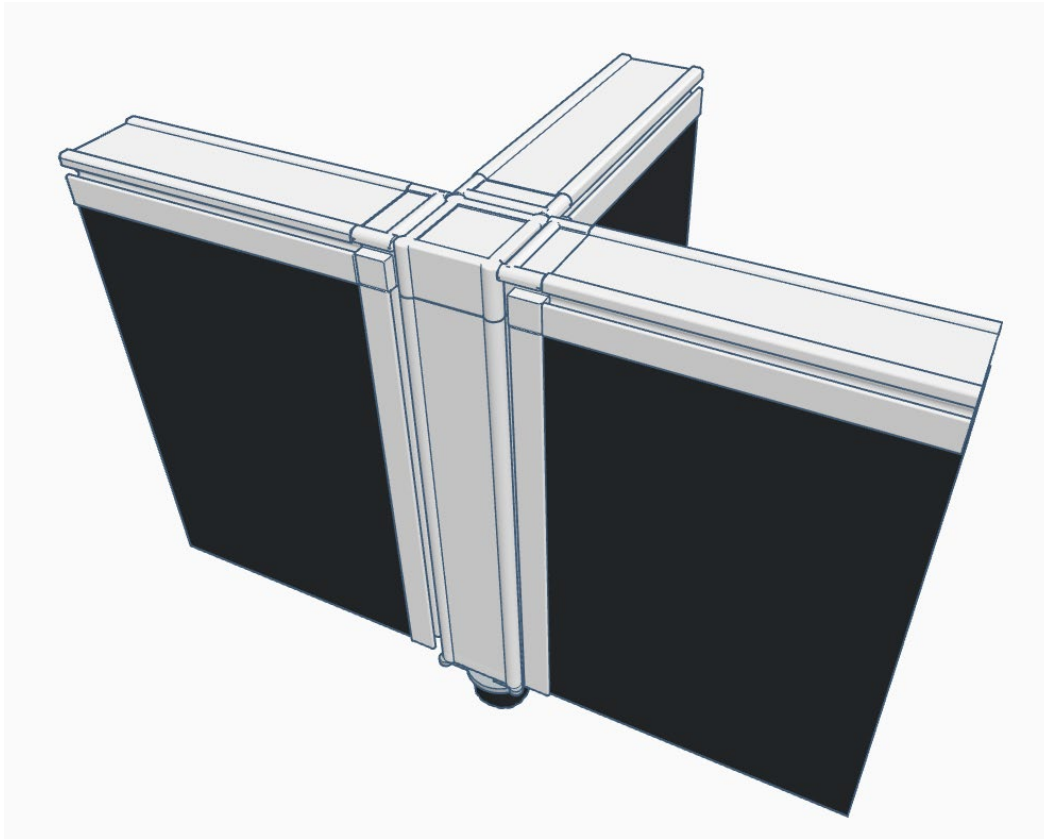


2. Assemble the height adjustable desk as per the supplied assembly instructions.




3. Move the height adjustable desk into position ensuring screens are flush to desktop.




4. Remove the end trim from the screen adjacent to the front corner of the desktop.

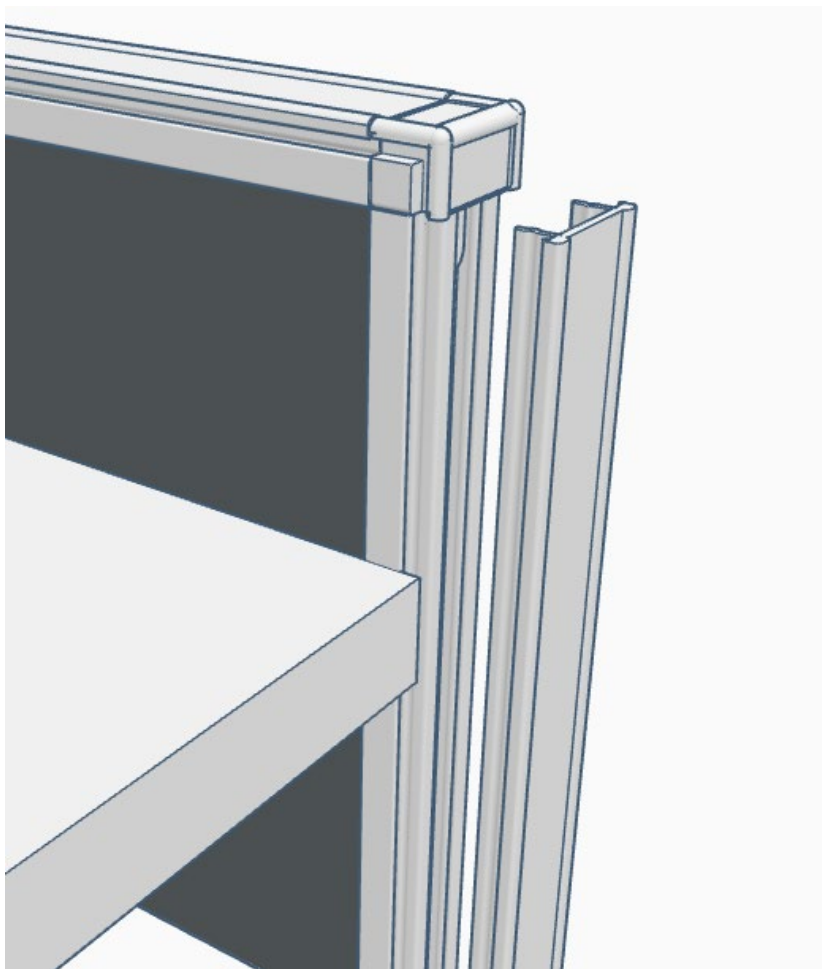


5. Slot the sliding bracket into the channel below the desktop and re-install the screen trim.

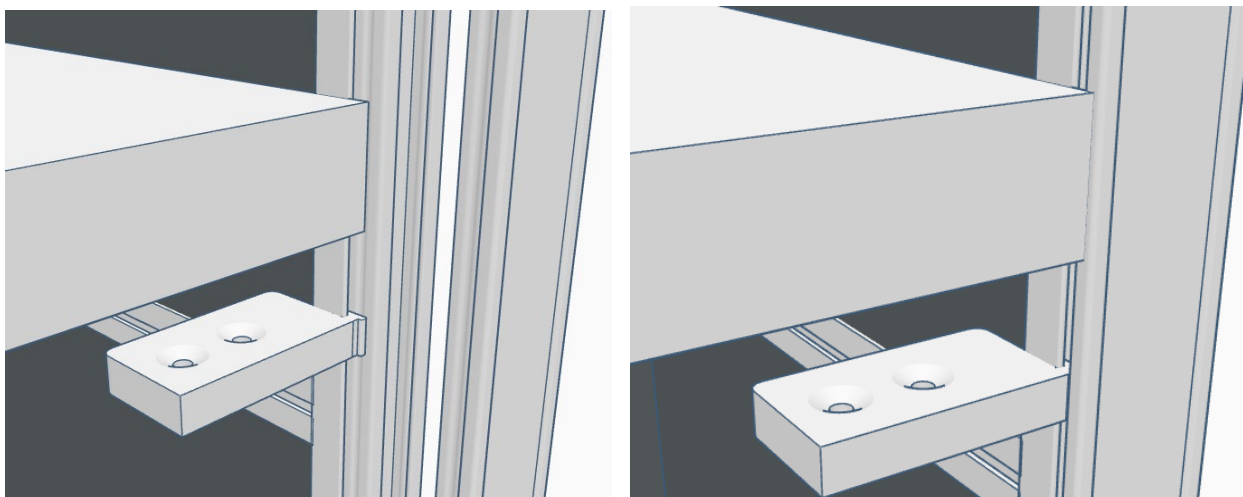

6. Slide the bracket up to meet the underside of the desktop and install two PH screws.

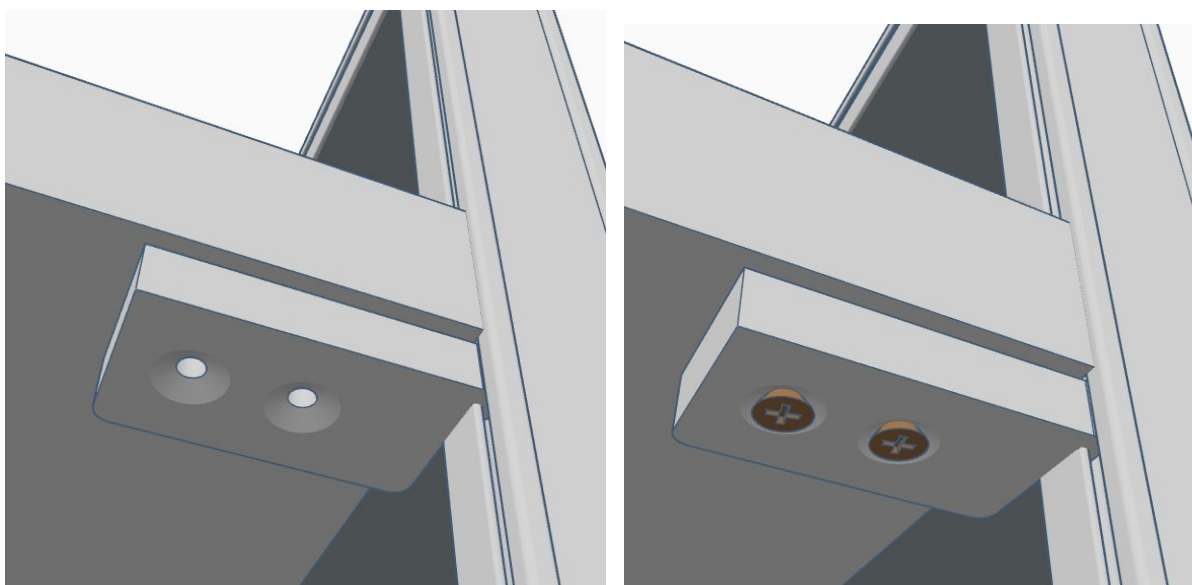

7. Repeat steps 4-6 for the opposite side.

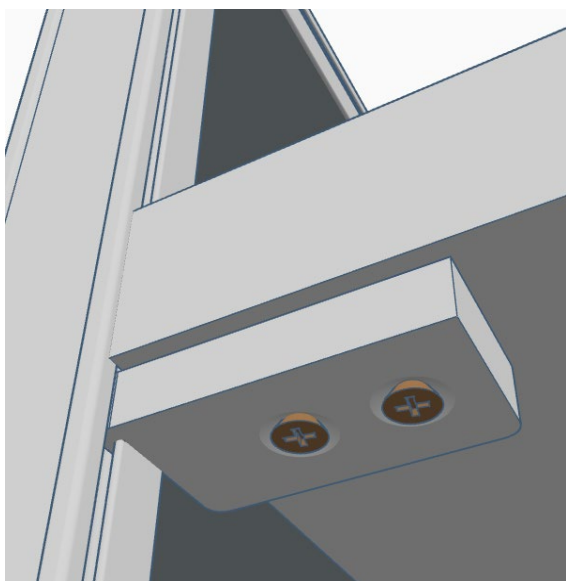

8. Test the operation of the desk. If the desk can rise above the height of the screen follow the desk's user manual to adjust the upper height limit.